

"We BARCODE Difficult Stuff"™

LabeLase® 30xx Tag Printer *Desktop Laser Printer for Metal Bar Codes Tags*

Fully automatic continuous-feed 30-Watt desktop laser printer for metal bar code tags!

The InfoSight LabeLase® 30xx Tag Printer is designed to function like the PC printer you probably already have on your desk, and fits into just as small a space. It plugs directly into the back of your PC, and with the free Producer™ software, you will be printing high-quality metal barcode tags in just minutes.

The LabeLase® 30xx Tag Printer accepts standard 300-foot (90-meter) rolls of continuous tag stock, pre-nicked & notched for easy breakoff after printing.

The advanced electronics and all-new optics configuration are designed for even higher reliability, ultimate ease of maintenance, and a printing speed that prints tags at a blazing 3X the speed of the LabeLase® 1000 Tag Printer.

The free Producer™ software is powerful yet easy to use, with new layout features emulating popular presentation software packages. The “What You See Is What You Get” approach makes creating simple or complex tag layouts a breeze.


InfoSight Corporation is well known for inventing the high temperature laser-markable InfoTag® in 1994, and creating the first fully automatic laser tag printer, the KE2700. InfoSight revolutionized tag printing in 1998 with the small-footprint KE2800-series markers for stand-alone use or incorporation into automatic attachment systems.

InfoSight redefined the industry in 2003 with the LabeLase® 1000 Tag Printer and now; with the LabeLase® 30xx Tag Printer, tags can be printed faster than with any other desktop tag printer on the market.




Features

- ❑ smallest 30 watt printer footprint available anywhere
- ❑ quiet operation
- ❑ integrated PC-based software for tag layout and printing
- ❑ continuous roll and single tag feeding are standard
- ❑ unattended batch or single-on-demand tag printing
- ❑ non-contact marking (no delicate pin matrix head)
- ❑ high quality barcodes meet AIM specs. Common symbologies pre-programmed, additional and custom symbologies available upon request.
- ❑ prints all PC-installed fonts, including multi-byte characters for Asian languages
- ❑ unlimited number of text, barcode, and graphic fields per tag
- ❑ unrivaled range of metal tags for temperatures up to 1100°C / 2000°F, acid resistance, atmosphere-controlled annealing, and the rainbow of colors.

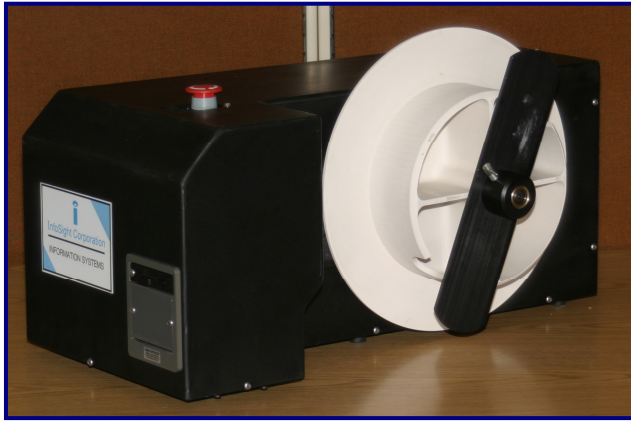

LabeLase® 30xx plugs directly into your PC.

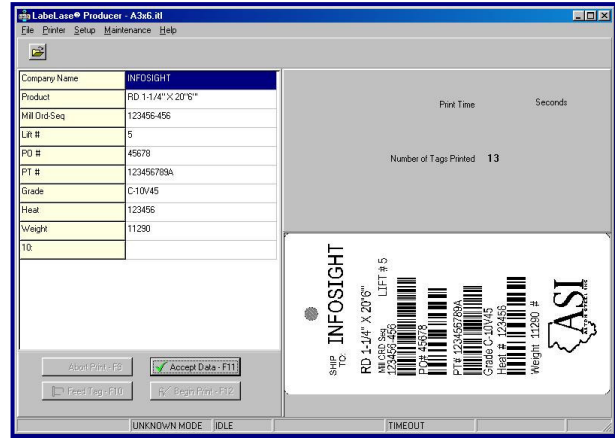

LabeLase® Producer™ software

Specifications

Physical dimensions	28" x 11" x 10" (711 x 280 x 254mm)
Weight	Less than 60 lbs. (27kg) without tag stock
Power requirements	100-240 VAC, 50/60 Hz, 4.5 A
Marking method	Pulsed CO ₂ laser beam, class 1 laser safety rating
Laser life	15,000 operating hours typical (approx. 5 million tag-inches)
Marking speed	Varies by tag type & data layout. Typical 1-4 sec/tag-inch
Barcode symbologies	Code 128, code 39, Interleaved 2 of 5, 2D (data matrix), UPC OptiCode®/Numbra®. Additional standard symbologies can be added, and custom/proprietary symbologies developed upon request.
Barcodes per tag	Unlimited
Maximum bar code length	24 inches (610mm)
Tag layout software	LabeLase® Producer™ provided at no charge for Windows XP (32 bit) / Vista (32 bit) / 7 (32 and 64 bit)
Tag Widths	3 inches (76mm nominal)
Tag Lengths	to 24 inches (610mm)
Communications Interface	RS232C serial, InfoSight Extended Protocol, USB & Ethernet



InfoSight Corporation
 20700 U.S. Highway 23, PO Box 5000, Chillicothe, Ohio 45601
 Tel: +1 (740) 642-3600 * Fax: +1 (740) 642-5001
 www.infosight.com www.traceability.com www.industrial-tags.com
 Email: sales@infosight.com
 Brochure #: LL30xx

LabeLase, InfoTag, Numbra & Opticode are registered trademarks of InfoSight Corporation
 Producer is a trademark of InfoSight Corporation
 "We BARCODE Difficult Stuff" is a trademark of InfoSight Corporation
 Technical Specifications are subject to change without notice.
 © Copyright 2011 InfoSight Corporation
 Printed in U.S.A. 06/11