




Labelase® 30XX Tag Printer

High Speed Desktop Metal Tag Printer

About the LL30XX

- Desktop Size
- Common Power Requirements
- Marks 3" (76mm) Wide InfoSight Metal Tags
- Continuous feed from a roll *OR* feed one tag at a time
- Data input from network or manual entry
- Serial, Ethernet, or USB connections
- All common barcodes
- Free Producer™ Software is Windows compatible

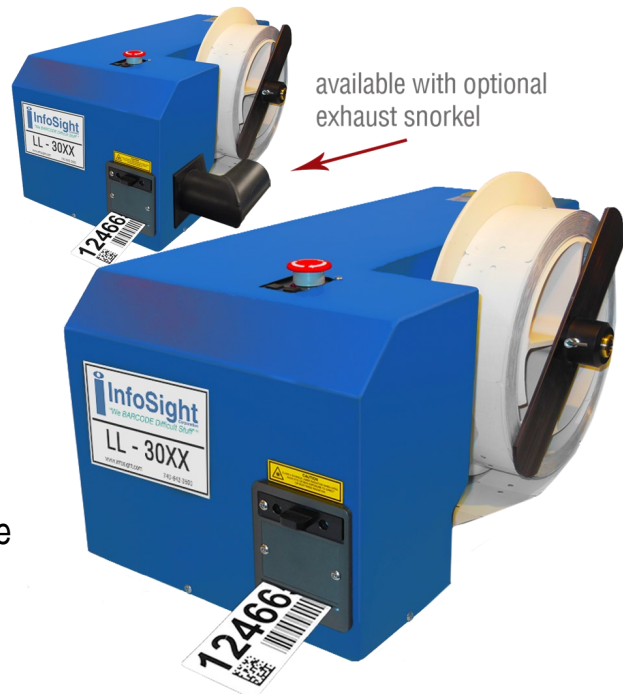

A New Industry Standard—More Tags in Less Time

Roughly three times faster than our industry leading LL1000, the LL30XX is especially valuable when production lines increase speeds, or when you need more data on your tags.

- ◆ **Sharp, clear text, barcodes, logos, graphics, and user selectable fonts.**
- ◆ **Higher performance, without sacrificing reliability or versatility.**
- ◆ **Allows for longer tags and bigger barcodes which can be read at a distance.**
- ◆ **One-year warranty and lifetime live 24/7 technical assistance.**





Labelase® 30XX Tag Printer

Technical Specifications

Dimensions	28"D x 13"H x 13"W (71 x 39 x 33 cm) With snorkel—18" W (46mm)
Net Weight	70 lbs (< 32 kg)
Power	120 - 240 VAC, 50/60 Hz, Amps (varies per model)
Tag Feed	Continuous roll or single tag
Data Input	Manual or network
Maximum barcode length	Up to 24.0 in (610 mm)
Barcodes Per Tag	Unlimited, within available space
Barcode Symbology	Creates 1D/2D barcodes. Custom or proprietary symbology can be developed. QR Code & Datamatrix
Tag Composition	InfoSight metal tags with laser-markable coatings
Communications Interface	PC to Printer: RS232C Serial, USB or Ethernet Host to PC: InfoSight Extended Protocol, File Transfer and Ethernet
Tag Layout Software	Producer™ software included free . Windows Compatible: 7, 8, 8.1 & 10 (32/64 bit)
	3036 Model
Laser	30 watts
Tag Width	3 " (76 mm)

