



PickleTag™

Tags for Rod and Wire Processors



- For applications in metal rod and wire processing
- Resistant to:
 - Heat—1000°F (538°C)
 - Chemicals—Acids, see reverse
 - Abrasion
 - UV Exposure
- 3" (76mm) Wide X Customized Length
- Metal tag with high contrast laser markable coating
- Colors by special order

- ◆ Barcodes and text are readable after hot acid baths
- ◆ Reduced handling for greater productivity and worker safety
- ◆ Readable text and barcodes before and after pickling
- ◆ Printed on InfoSight LabelLase® Printers with high contrast alphanumeric characters, graphics, and 1D & 2D barcodes. →
- ◆ Preprinted tags available.



Find out how easy it is to design and print your tags with a LabelLase® Metal Tag Printer & free Producer™ Software.




TEST PICKLETAG™ IN YOUR PROCESS—CALL TODAY FOR SAMPLES

PickleTag™

Technical Specifications

Industry	Metal rod and wire processing
Typical Customer	Rod mills; Wire mills; Wire processing plants; Fabricators; Anodizers; Metals service providers
Purpose	Tracking finished and unfinished work pieces through a metal pickling process
Resistance	<p>Heat: 1000°F (538°C) for 2 hours</p> <p>Chemical: 180°F (82°C) in 20 H₂SO₄ for 2 hours; 100°F (38°C) in 24% HCL for 2 hours</p> <p>Abrasion: Moderate</p> <p>Ultraviolet: Highly resistant to sunlight and fading</p>
Sizes	<p>Width: 3.0 in (76 mm)</p> <p>Lengths: to customer specification, not less than 1.0 in (25 mm)</p> <p>Typical Lengths: 3.0 in (76mm), 4.0 in (102mm), 5.0 in (127mm)</p>
Composition	Metal with high contrast laser-markable coatings
Available Forms	Print on-site with one of InfoSight's durable, laser metal tag printers or pre-printed by InfoSight
Available Colors	Standard white, colors by special order

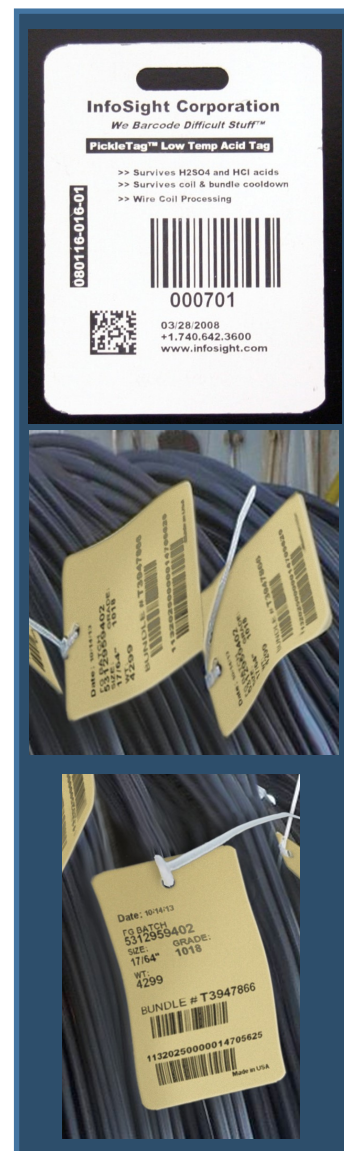

Technical specifications are subject to change without notice.
 Producer, PickleTag, and "We Barcode Difficult Stuff" are trademarks of InfoSight.
 Labelase is a registered trademark of InfoSight.
 Copyright 2020 InfoSight Corporation