

InfoTag[®]

Industrial Tags for Product Identification



- For industrial applications with harsh environments
- Resistant to:
 - Heat—up to 1800°F (982°C)
 - Chemicals
 - Abrasion
 - UV Exposure
- 3" (76mm) Wide X Customized Length
- Metal substrate with laser markable coating

- ◆ Track Products Indoors and Out.
- ◆ Versatile barcode ready identification tag.
- ◆ Prevent mixed batches and lost products.
- ◆ Error free product movement through processes, inventory, shipping, and end use.
- ◆ Available nicked and notched.
- ◆ Printed on InfoSight Labelase[®] Printers with high contrast alphanumeric characters, graphics, and 1D & 2D barcodes.
- ◆ Preprinted tags available.



Find out how easy it is to design and print your tags with a Labelase[®] Metal Tag Printer & free Producer[™] Software.




PRINTERS & TAGS THAT CUT COSTS, INCREASE SAFETY, & ENSURE TRACEABILITY

WE BARCODE DIFFICULT STUFF.®

InfoTag®

Technical Specifications

Industry	Industrial manufacturing, distribution
Typical Customer	Harsh environments: more durable than paper or plastic
Purpose	Rugged barcode ready identification - will not tear or detach during handling, processing and shipping
Resistance	Heat: In excess of 1800°F (982°C)
	Chemical: Resistant to common solvents
	Abrasion: Moderate
	Ultraviolet: Highly resistant to sunlight and fading
Sizes	Width: 3.0 in (76 mm) Lengths: to customer specification, not less than 1.0 in (25 mm)
Composition	Stainless steel (high temp) or carbon steel (medium temp) substances with high contrast laser-markable coatings
Available Forms	Print on-site with one of InfoSight's durable, laser metal tag printers or preprinted by InfoSight
Available Colors	Standard white; colors available

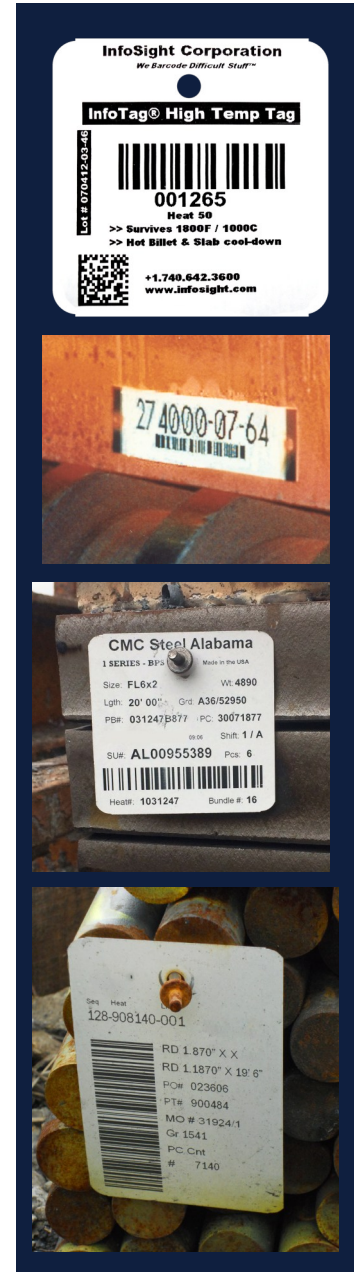

Technical specifications are subject to change without notice.

Producer is a trademark of InfoSight.

Labelase, InfoTag, and "We Barcode Difficult Stuff" are registered trademarks of InfoSight.

Copyright 2023 InfoSight Corporation